

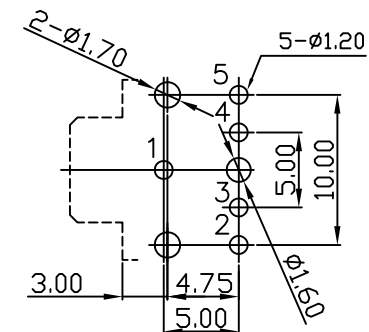
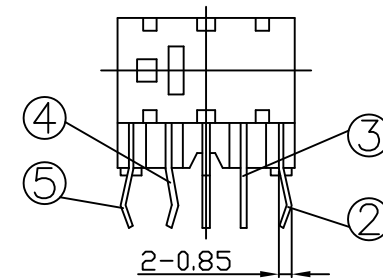
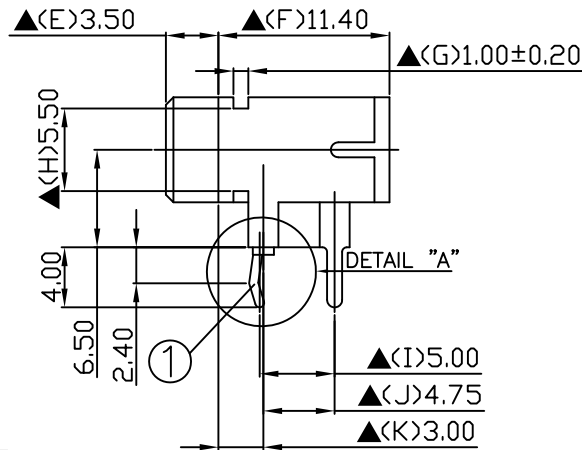


DETAIL "A"(1:1)

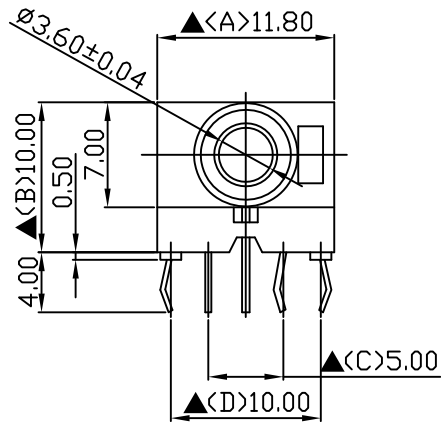

Pin Hole Layout
(Jack Bottom View)

7.	Cover	PBT+15%	1	Black Color
6.	Housing	PBT+15%	1	Black Color
5.	Tip Spring	0.25T Phosphor Copper	1	Silver Plated
4.	Break Terminal	0.4T Brass	1	Silver Plated
3.	Break Terminal	0.4T Brass	1	Silver Plated
2.	Ring Spring	0.3T Phosphor Copper	1	Silver Plated
1.	Earth Terminal	0.5T Brass	1	Silver Plated
NO.	Description	Material	Q'TY	Finish



S.C.PRECISION INDUSTRIAL CO., LTD. 旭 全	DATE	DWN	CHKD	APVD	MANAGER
	12.15.2021	王平華			

PART NAME :3.5φ PHONE JACK	PART NUMBER:SCJ349P00US0B01G	VERSION:5.0
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT:mm	SCALE:1/1

SPECIFICATIONS:
 Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲: The Most Important Dimension

For Redference
 僅供參考
 RoHS&SVHC
 Compliant