


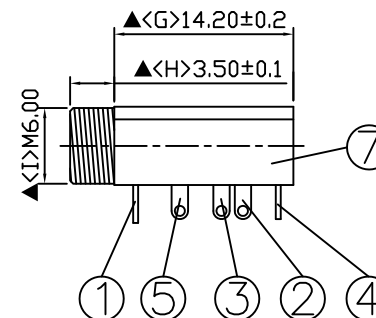
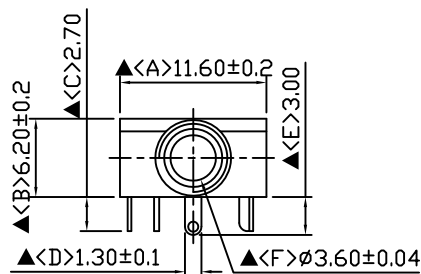

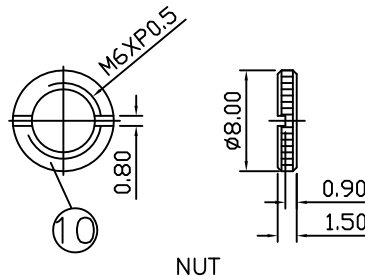




10.	NUT	Low lead Brass Rod	1	Nickel plated
9.	Spring	SUS-304	1	
8.	Cover	PC	1	Trans Parent
7.	Housing	POM	1	Black Color
6.	Barrel(W/Thread)	Low lead Brass Rod	1	Nickel plated
5.	Tip Spring	0.25T Phosphor Bronze	1	Silver Plated
4.	Break Terminal	0.4T Brass	1	Silver Plated
3.	Break Terminal	0.4T Brass	1	Silver Plated
2.	Ring Spring	0.25T Phosphor Bronze	1	Silver Plated
1.	Earth Terminal	0.4T Brass	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

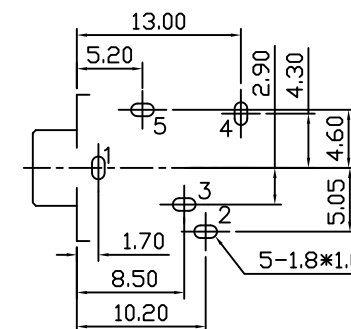

Pin Hole Layout
(Jack Bottom View)

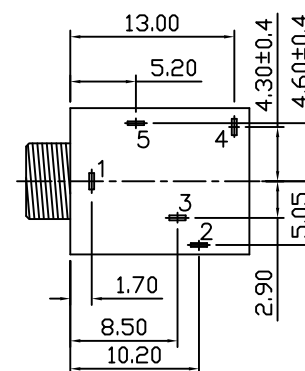

S.C.PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
09.11.2020	王平華			


PART NAME: 3.5∅ PHONE JACK

PART NUMBER: SCJ354M1NUS1B00L

VERSION:1.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Redference
僅供參攷

RoHS&SVHC
Compliant