


8.	Nut	2.0T Brass	1	Nickel Plated
7.	Housing	PBT+15%	1	Black Color
6.	Cover	PA9T	1	Black Color
5.	Shunt Terminal B	0.4T Brass	1	Silver Plated
4.	Shunt Terminal A	0.4T Brass	1	Silver Plated
3.	Ring Spring	0.25T Phosphor Bronze	1	Silver Plated
2.	Tip Spring	0.3T Phosphor Bronze	1	Silver Plated
1.	Earth Terminal	0.5T Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

<b>S.C. PRECISION INDUSTRIAL CO., LTD.</b>	DATE	DWN	CHKD	APVD	MANAGER
	12.09.2009	葉麗清	陳國強		

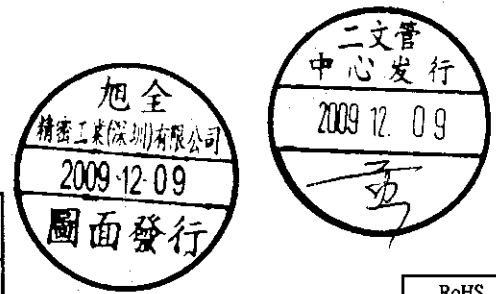

RoHS  
Compliant

PART NAME: 3.5 $\phi$ PHONE JACK	PART NUMBER: SCJ364P10US3B00G	VERSION: 5.0
TOLERANCE: $\pm 0.3$ mm UNLESS OTHERWISE SPECIFIED	UNIT: mm	SCALE: 1/1

**SPECIFICATIONS:**  
 Contact Resistance :30m $\Omega$  max  
 Insulation Resistance :100M $\Omega$  min.at DC500V  
 Dielectric Withstand Voltage: AC 500V for one minute  
 Remark: ? The Most Important Dimension