

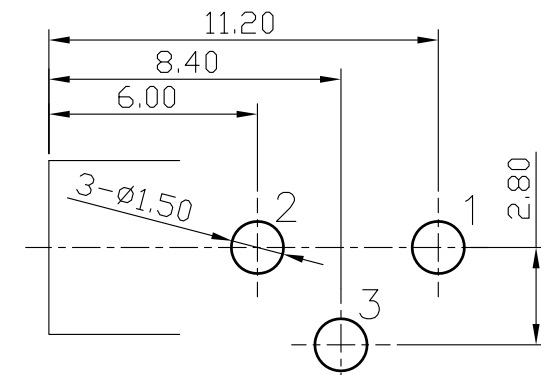
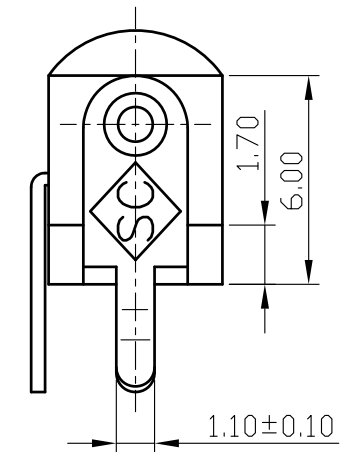
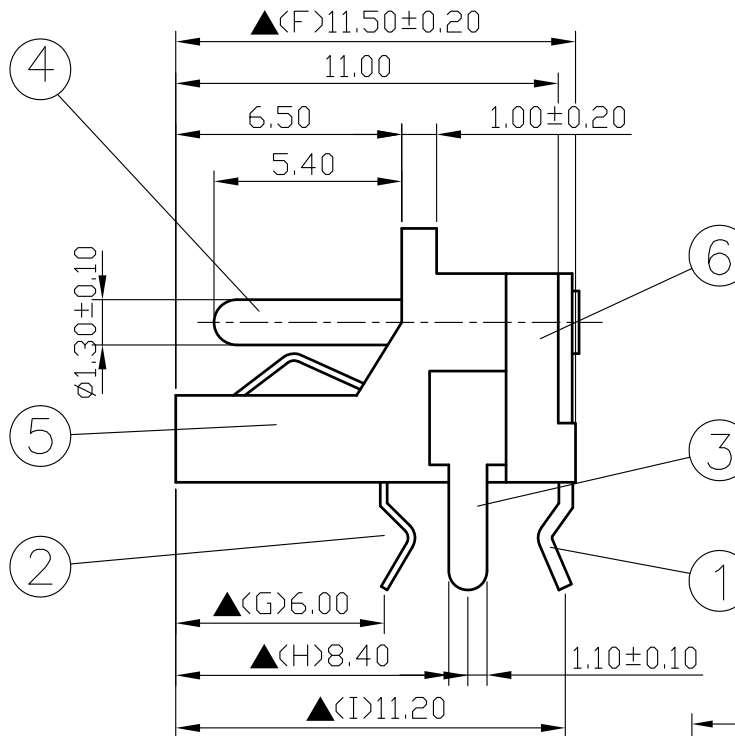


|           |                                                                                   |
|-----------|-----------------------------------------------------------------------------------|
| SCHEMATIC |  |
| MODEL NO  | C                                                                                 |

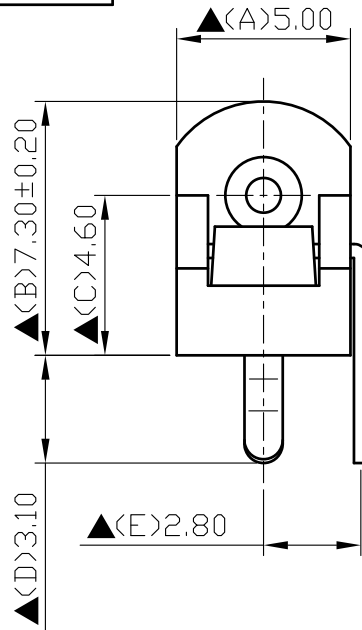

| 6.  | Cover          | PBT+15%              | 1     | Black Color   |
|-----|----------------|----------------------|-------|---------------|
| 5.  | Housing        | PBT+30%              | 1     | Black Color   |
| 4.  | Pin(1.3Ø)      | Copper               | 1     | Nickel Plated |
| 3.  | Break Terminal | 0.4T Brass           | 1     | Silver Plated |
| 2.  | Sleeve Spring  | 0.2T Phosphor Bronze | 1     | Silver Plated |
| 1.  | Pin Terminal   | 0.4T Brass           | 1     | Silver Plated |
| NO. | Description    | Material             | Q' TY | Finish        |

|                                                                                                                                |            |     |      |      |         |
|--------------------------------------------------------------------------------------------------------------------------------|------------|-----|------|------|---------|
|  <b>S.C.</b> PRECISION INDUSTRIAL CO., LTD. | DATE       | DWN | CHKD | APVD | MANAGER |
|                                                                                                                                | 10.22.2021 | 王平華 |      |      |         |

|                                              |                                                                                               |             |
|----------------------------------------------|-----------------------------------------------------------------------------------------------|-------------|
| PART NAME : DC POWER JACK                    | PART NUMBER: SCD415ACS003B00G                                                                 | VERSION:9.0 |
| TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED | UNIT:mm  | SCALE:1/1   |

|                                         |                         |                        |
|-----------------------------------------|-------------------------|------------------------|
| Pin Hole Layout<br>(Jack Bottom View)   |                         | For Redference<br>僅供參考 |
| SPECIFICATIONS:                         |                         | RoHS&SVHC<br>Compliant |
| Contact Resistance                      | : 30mΩ max              |                        |
| Current Rating                          | : Max 5A , 24V DC       |                        |
| Insulation Resistance                   | : 100MΩ min. at DC 500V |                        |
| Dielectric Withstanding Voltage:        | AC 500V for one minute  |                        |
| Remark: ▲: The Most Important Dimension |                         |                        |