

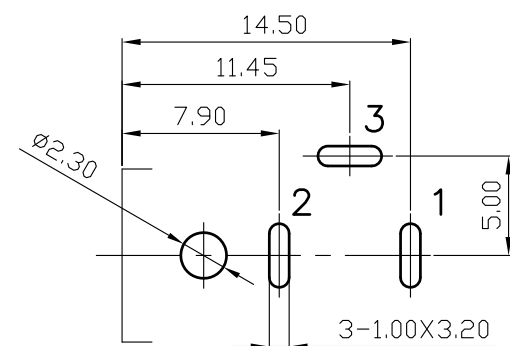

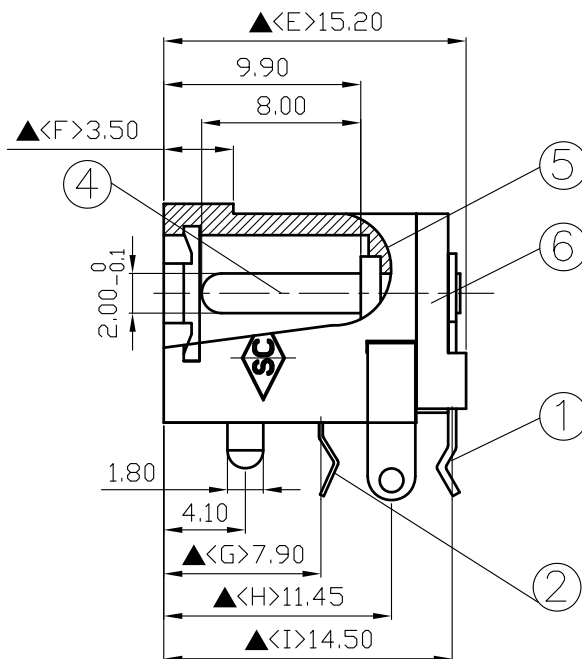


|           |                                                                                   |
|-----------|-----------------------------------------------------------------------------------|
| SCHEMATIC |  |
| MODEL NO  | C                                                                                 |

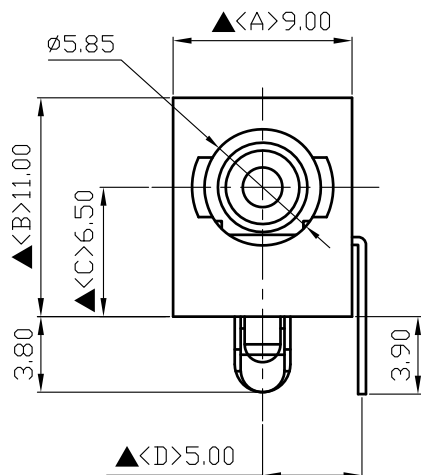

Pin Hole Layout  
(Jack Bottom View)

For Redference  
僅供參考

RoHS&SVHC  
Compliant

SPECIFICATIONS:  
Contact Resistance : 30mΩ max  
Current Rating : Max 5.0A , 24V DC  
Insulation Resistance : 100MΩ min. at DC 500V  
Dielectric Withstand Voltage : AC 500V for one minute  
Remark: ▲: The Most Important Dimension

| 6.  | Cover          | PBT+30%              | 1    | Black Color   |
|-----|----------------|----------------------|------|---------------|
| 5.  | Housing        | PBT+30%              | 1    | Black Color   |
| 4.  | Pin(2.0φ)      | Brass                | 1    | Nickel Plated |
| 3.  | Break Terminal | 0.4T Brass           | 1    | Silver Plated |
| 2.  | Sleeve Spring  | 0.2T Phosphor Bronze | 1    | Silver Plated |
| 1.  | Pin Terminal   | 0.4T Brass           | 1    | Silver Plated |
| NO. | Description    | Material             | Q'TY | Finish        |



S.C. PRECISION INDUSTRIAL CO., LTD.

| DATE       | DWN | CHKD | APVD | MANAGER |
|------------|-----|------|------|---------|
| 09.29.2021 | 王平華 |      |      |         |

PART NAME:DC POWER JACK

PART NUMBER:SCD443CCS013B00G

VERSION:7.0

TOLERANCE:±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1