
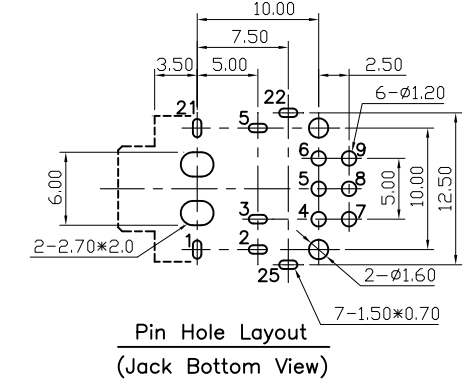


16.	Sequins	Tin Phosphor Bronze	2	
15.	Insulator	PA66+33%	1	Black Color
14.	Spring	SUS-304		
13.	Back Housing Cover	PA66+33%	1	Transparent
12.	Back Housing	PA66+33%	1	Black Color
11.	Housing	PBT	1	Black Color
10.	Switch Pin	0.4T Brass	6	Silver Plated
9.	Tip Lead(TOP)	0.4T Brass	1	Silver Plated
8.	Tip Spring(TOP)	0.25T Phosphor Copper	1	Silver Plated
7.	Ring Lead(TOP)	0.4T Brass	1	Silver Plated
6.	Ring Spring(TOP)	0.25T Phosphor Copper	1	Silver Plated
5.	Earth Terminal(TOP)	0.4T Phosphor Copper	1	Silver Plated
4.	Tip Spring(DOWN)	0.25T Phosphor Copper	1	Silver Plated
3.	Break Terminal(DOWN)	0.4T Brass	1	Silver Plated
2.	Ring Spring(DOWN)	0.3T Phosphor Copper	1	Silver Plated
1.	Earth Terminal(DOWN)	0.4T Phosphor Copper	1	Silver Plated
NO.	Description	Material	Q'TY	Finish



<b>S.C. PRECISION INDUSTRIAL CO., LTD.</b> 旭 全	DATE	DWN	CHKD	APVD	MANAGER
	06.03.2024	王放策			

For Redference  
僅供參考

RoHS&SVHC  
Compliant

PART NAME : 3.5φ PHONE JACK	PART NUMBER : SCJ352P00WS0B00G	VERSION:7.0
TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED		SCALE:1/1

SPECIFICATIONS:  
 Contact Resistance : 30mΩ max  
 Insulation Resistance : 100MΩ min. at DC 500V  
 Dielectric Withstand Voltage : AC 500V for one minute  
 Remark: ▲: The Most Important Dimension