
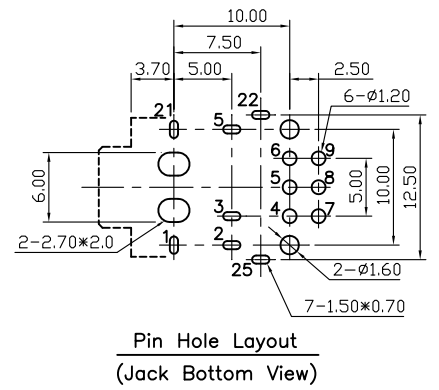


17.	Sequins	Tin Phosphor Bronze	2	
16.	Insulator	PA66+33%	1	Black Color
15.	Spring	SUS-304	1	
14.	Metal Shell	0.2T Phosphor Copper	1	Silver Plated
13.	Back Housing Cover	PA66+33%	1	Transparent
12.	Back Housing	PA66+33%	1	Black Color
11.	Housing	PBT	1	Black Color
10.	Switch Pin	0.4T Brass	6	Silver Plated
9.	Tip Lead(TOP)	0.4T Brass	1	Silver Plated
8.	Tip Spring(TOP)	0.25T Phosphor Copper	1	Silver Plated
7.	Ring Lead(TOP)	0.4T Brass	1	Silver Plated
6.	Ring Spring(TOP)	0.25T Phosphor Copper	1	Silver Plated
5.	Earth Terminal(TOP)	0.4T Phosphor Copper	1	Silver Plated
4.	Tip Spring(DOWN)	0.25T Phosphor Copper	1	Silver Plated
3.	Break Terminal(DOWN)	0.4T Brass	1	Silver Plated
2.	Ring Spring(DOWN)	0.3T Phosphor Copper	1	Silver Plated
1.	Earth Terminal(DOWN)	0.4T Phosphor Copper	1	Silver Plated
NO.	Description	Material	Q'TY	Finish



S.C. PRECISION INDUSTRIAL CO., LTD.	DATE	DWN	CHKD	APVD	MANAGER
	06.03.2024	王放策			

For Redference
僅供參考

**RoHS&SVHC
Compliant**

PART NAME : 3.5φ PHONE JACK	PART NUMBER : SCJ352P00WS0BNSG	VERSION:7.0
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED		SCALE:1/1

SPECIFICATIONS:
 Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstand Voltage : AC 500V for one minute
 Remark: ▲: The Most Important Dimension