
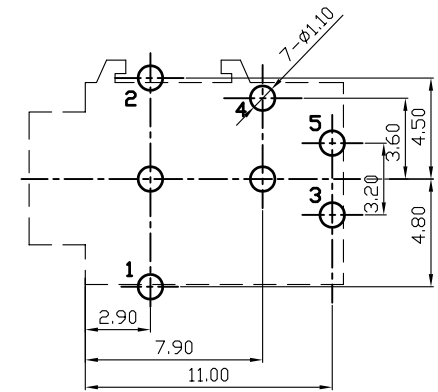


Schematic	
MODEL NO	E

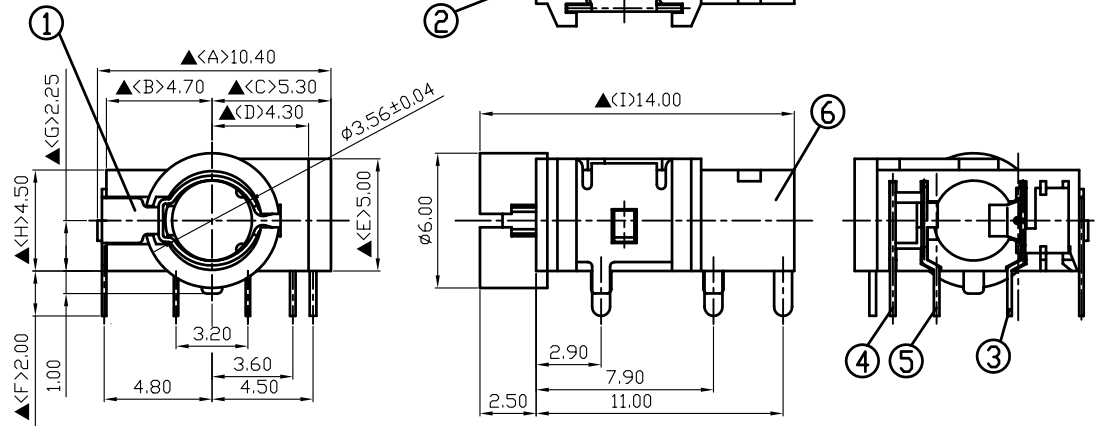

6.	Housing	PBT+15%G	1	Black Color
5.	Break Terminal C	0.25T Bronze	1	Gold Plated
4.	Break Terminal B	0.25T Phosphor Bronze	1	Gold Plated
3.	Break Terminal A	0.2T Phosphor Bronze	1	Gold Plated
2.	Ring Spring	0.3T Phosphor Bronze	1	Gold Plated
1.	Earth Terminal	0.2T Phosphor Bronze	1	Gold Plated
NO.	Description	Material	Q'TY	Finish

S.C.PRECISION INDUSTRIAL CO., LTD. 旭 全	DATE	DWN	CHKD	APVD	MANAGER
	01.06.2012				

PART NAME : 3.5φ PHONE JACK	PART NUMBER : SCJ376R7GEG0B00G	VERSION: 3.0
TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT: mm	SCALE: 1/1

Pin Hole Layout
 < Jack Bottom View >

RoHS
Compliant

For Reference
僅供參考

SPECIFICATIONS:
 Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲ : The Most Important Dimension