
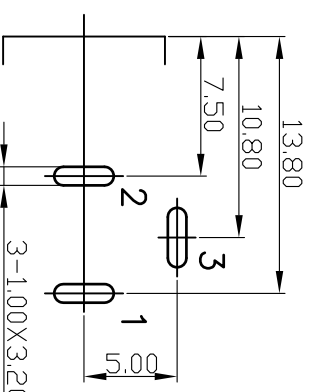
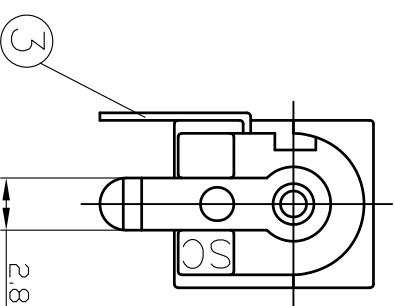
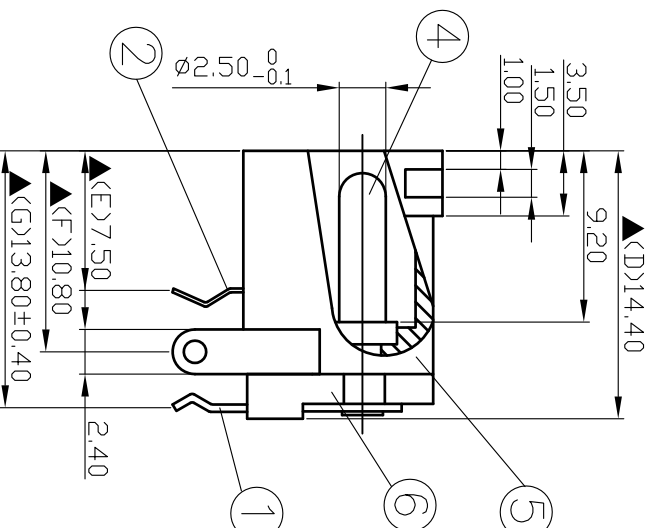


SCHEMATIC	
MODEL NO	C

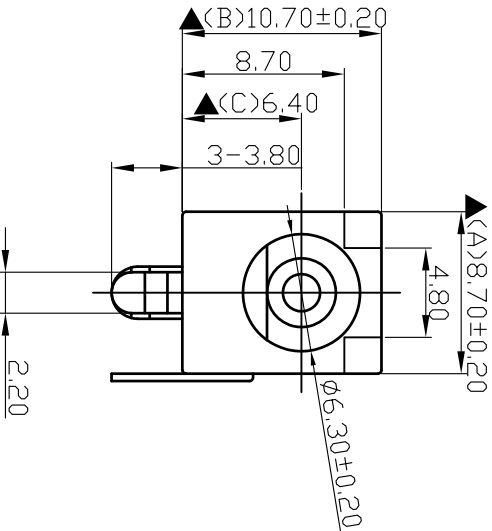

Pin Hole Layout
(Jack Bottom View)

6. Cover	PBT+30%	1	Black Color
5. Housing	PBT+30%	1	Black Color
4. Pin(2.5φ)	Brass	1	Nickel Plated
3. Break Terminal	0.4T Brass	1	Silver Plated
2. Sleeve Spring	0.2T Phosphor Bronze	1	Silver Plated
1. Pin Terminal	0.4T Brass	1	Silver Plated
NO. Description	Material	Q'TY	Finish

 **S.C.** PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
09.27.2021	王平華			

PART NAME : DC POWER JACK	PART NUMBER: SCD438DCS033B00G	VERSION:6.0
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT:mm	SCALE:1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max
Current Rating : Max 5.0A , 16V DC
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension

RoHS&SVHC
Compliant

For Reference
僅供參考