


10.	Washer	0.5T Steel	1	Nickel Plated
9.	Nut	2.0T Steel	1	Nickel Plated
8.	Insulator	POM	1	Ivory Color
7.	Insulator	Red Vulcanited Fibre	1	Red Color
6.	Barrel(W/Thread)	Low Lead Brass Rod	1	Nickel Plated
5.	Cover	0.5T Steel	1	Nickel Plated
4.	Housing	POM	1	Black Color
3.	Tip Spring	0.35T Phosphor Bronze	1	Silver Plated
2.	Transfer Terminal	0.4T Brass	1	Silver Plated
1.	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

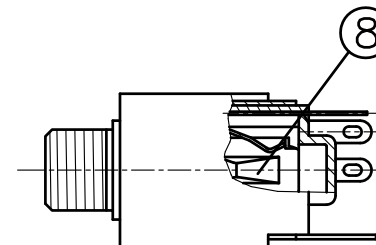

<b>S.C.</b> PRECISION INDUSTRIAL CO., LTD.	DATE	DWN	CHKD	APVD	MANAGER
	08.13.2021	王平華			

PART NAME : 6.3φ PHONE JACK	PART NUMBER: SCJ610M2NGS3B21L	VERSION: 1.0
-----------------------------	-------------------------------	--------------

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT: mm	SCALE: 1/1
---	----------	------------

For Redference  
僅供參考

RoHS&SVHC  
Compliant

SPECIFICATIONS:  
 Contact Resistance : 30mΩ max  
 Insulation Resistance : 100MΩ min. at DC 500V  
 Dielectric Withstanding Voltage: AC 500V for one minute  
 Remark: ▲: The Most Important Dimension