
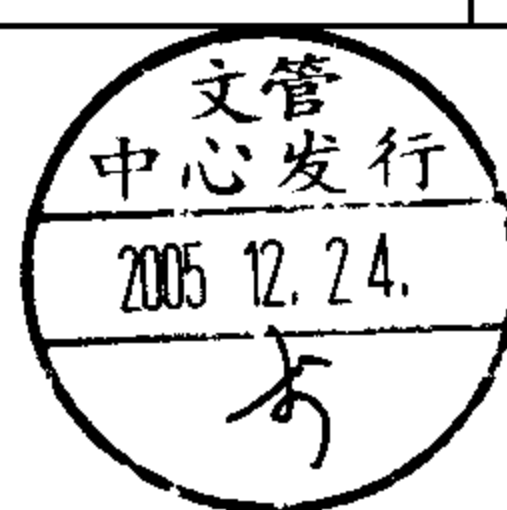


6.	Nut	2.0T Brass	1	Nickel Plated
5.	Housing	PBT+15%	1	Black Color
4.	Cover	PA9T	1	Black Color
3.	Ring Spring	0.25T Phosphor Bronze	1	Silver Plated
2.	Tip Spring	0.3T Phosphor Bronze	1	Silver Plated
1.	Earth Terminal	0.5T Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

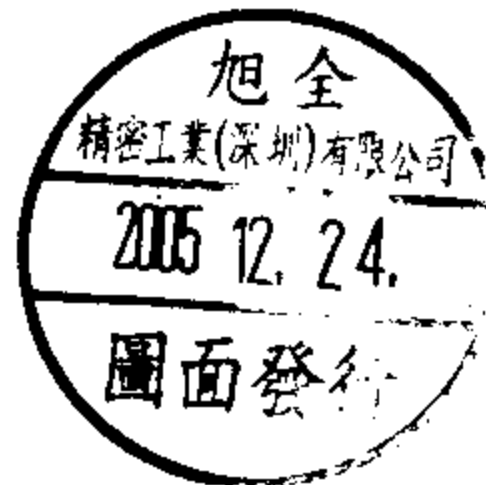

<b>S.C. PRECISION INDUSTRIAL CO., LTD.</b>	DATE	DWN	CHKD	APVD	MANAGER
	12.09.2005	易愛娣	李	王	 總經理 黃振之

PART NAME: 3.5 $\phi$  PHONE JACK      PART NUMBER: SCJ364P10XS3B00G      VERSION: 4.0

TOLERANCE:  $\pm 0.3$ mm UNLESS OTHERWISE SPECIFIED      UNIT: mm      SCALE: 1/1

SPECIFICATIONS:  
 Contact Resistance:  $\leq 30$ m $\Omega$  max  
 Insulation Resistance:  $\geq 100$ M $\Omega$  min. at DC500V  
 Dielectric Withstand Voltage: AC 500V for one minute  
 Remark:  $\blacktriangle$ : The Most Important Dimension